

HIGH EFFICIENT
LED STREET LIGHTS

Aerolite LSL® 30



- Best selling model
- Cutting edge light performance
- Most aerodynamic robust housing for excellent durability
- Uniquely optimized heat dissipation extends life time
- Suitable for smaller roadways, private drive-ins, parking lots, bicycle lanes, industrial buildings



GRAH
LED LIGHTING

Aerolite LSL® 30



Best quality - price ratio

Patented Aerolite LSB0 are one of the only LED street lights in the world produced under highest automotive production standard ISO/TS 16949.

Top quality materials, guaranteed lifetime, unique design, high energy efficiency and excellent lighting performance bring you numerous advantages for affordable price.



GRAH revolutionary 360° APPROACH™ to LED street lighting

By combining know-how and expertise from LED technology with our own integrated 360° APPROACH™, every single component of the luminaire is studied and constantly optimized from a totally new perspective to achieve unique innovative solutions, which are successfully solving all the challenges and are setting new standards in LED street lighting.

Aerolite LSL® 30 - main characteristics:



- Luxeon Rebel LED top quality, awarded LEDs
- LED GENION bi-optimized LED modules exploiting every LED chip for excellent durability to the fullest extent
- QUADRUM optics: FULL CUTOFF optics (IES and IDA standards) with high efficient reflectors directs light beams exactly where it is needed, feature reducing maintenance costs achieving cutting edge light performance
- INFINITY driver: customized, intelligent driver for optimal output with ultra energy efficient output
- MATRIX 3D light: unique light shape with asymmetric distribution for best possible light uniformity / optimal surfaces
- COOLVERT: uniquely optimized heat dissipation extends lifetime
- AEROCOMPACT housing: most aerodynamic, ultra slim luminaire with robust housing from aluminum alloy enabling increased performance and extended lifetime
- ULTRA COATING: life time multi layer protection of LED modules for excellent durability
- ALL WEATHER RESISTANT: ingress protection rate IP65, with AND IMPACT RESISTANCE impact rate
- complete electronic control of driver and LED light sources
- ability to use an ordinary regulation of the light output from 100% with a rudder signal from the driver
- ability to regulate light from 100% with a rudder signal from the driver
- produced under strictest standards: Automotive ISO/TS 16949
- 100% made in European Union
- environmentally friendly ECO technology prepared for a seamless upgrade of the system for different multifunction options

MOUNTING

- fast and universal mounting to a lamp post with a diameter of 60 or 76 mm
- alternative mounting concepts possible on request
- possibility of setting the angle of mounting in the range of -15° to +15°
- the light can be adjusted in the horizontal position – swing
- recommended mounting height is 4 - 7 m

APPLICATION


- smaller roadways, private drive-ins
- wherever the required level of illumination is 0,5cd/m² (S3, ME5 street category)
- suitable for parking lots, bicycle lanes, industrial buildings

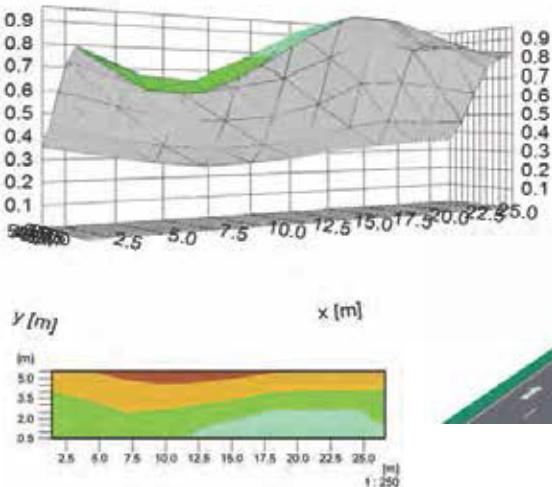


AEROLITE LSL 30 TECHNICAL DATA

Light source	30 LED high power by Lumileds
Voltage	110 – 250 V (50 - 60 Hz)
Luminaire flux	From 2.600 up to 4.200 lm
Color temperature	4.200 K (other color temperatures on request)
Power consumption	From 26 up to 49 W (depending on lumen package)
Luminous efficiency	100 lm/W
Lifetime	Min. 60.000 hours / up to 100.000 hours
Protection rating	IP66
Temperature range	-30° to +60°C
Working temperature	+55°C
Safety class	Class I or II
Material	Housing: aluminium alloy Housing sealing: silicon, heat resistant Cover: PMMA
Housing color	RAL 9006
Weight	3,8 kg
Dimensions (LxHxW)	430 mm x 310 mm x 135 mm

Asymmetric, LS, 3200lm



Asymmetric, LS, 4200lm



For more information visit
www.grahlighting.com

HIGH EFFICIENT
LED STREET LIGHTS

Aerolite LSL® 30

Code / Order No.	Version	Luminaire flux	Power consumption	Driving current	LED type
1820711	Basic (no dimming)	2.600 lm	26 W	280 mA	LS
1820713	Power red.50%				
1820715	Dim. range 1-100%				
1800711	Basic (no dimming)	3.200 lm	34 W	350 mA	LS
1800713	Power red.50%				
1800715	Dim. range 1-100%				
1810711	Basic (no dimming)	4.200 lm	49 W	500 mA	LS
1810713	Power red.50%				
1810715	Dim. range 1-100%				

Code / Order No.	Bracket
2601012	Fix angle Ø 60
2601001	Variable angle +/-15 Ø 60
2601011	Variable angle +/-15 Ø 76



Your benefit is our leading priority

We are committed to constant and never ending improvement of people, sources, processes to achieve best possible products' quality, efficiency, performance and bring high added value to satisfy our clients.

Preserving environment for future generations

Our production is without harmful substances and pollution free. We continually seek new ways to improve our activities in order to preserve our environment for future generation.



Trusted partner for leading car manufacturers

Grah Lighting was established as a fully specialized division for the LED street and industrial light program of the company SGA (Schefenacker Grah Automotive – SG Automotive d.o.o.), which is a trusted partner and supplier for leading car manufacturers such as, Mercedes Benz, BMW, Audi, Porsche, Ferrari, Maybach, Rolls Royce, VW, Ford, GM, Nissan, Volvo, Toyota, Cadillac, Chrysler,...



Pioneers of utilizing LED technology with 15 years of experience

Grah Lighting, as the integral part of Grah Group, has more than 15 years of experience in LED technology.

Grah Group is formed by integrated and subsidiary companies of Grah Automotive worldwide, employs more than 1000 people and was one of the first on the market utilizing LED technology in lighting and automotive signalization.



Manufacture:

G RAH
LED LIGHTING

GRAH LIGHTING®
SG Automotive d.o.o.

Mestni trg 5b
SI-3210 Sl. Konjice
Slovenia, EUROPEAN UNION

T +386 82 801 424
F +386 82 801 402
info@grahlighting.com
www.grahlighting.com

Distribution:



NICHE LIGHTING

1300 780 565 | info@nichelighting.com.au